

CONCRETE INDUSTRY





Dunlop Hiflex is one of the market's most established suppliers of hydraulic fluid conveyance and industrial fluid conveyance products and systems.

The manufacturing of hoses and couplings, for both high and low pressure, gives Dunlop Hiflex extensive knowledge of the products and enable us to put forward suggestions for new solutions and improvements for the industry.





// INDEX

// DUNLOP HIFLEX	6
// ALFAGOMMA GROUP	7
// ASSEMBLED CONCRETE HOSES	8
// CONCRETE HOSES	10
// CONCRETE COUPLINGS	12
// MORTAR HOSES	16
// MORTAR COUPLINGS	17

// ICONS



Conductive tube & cover
 $R \leq 10^6 \Omega/\text{length}$



High performance
 product




Abrasive resistance

// DUNLOP HIFLEX

// THE FIRST HOSES

Scotland, 1887. John Boyd Dunlop, a Scottish born inventive veterinarian observes his son as he's cycling down a bumpy road. The bike has hard solid rubber tyres and the ride is rough and shaky. The ride is neither fast nor particularly comfortable. He then comes up with an idea of wrapping an air filled rubber hose around the rim. In 1888 he patented the idea and the rest as we say, is history.

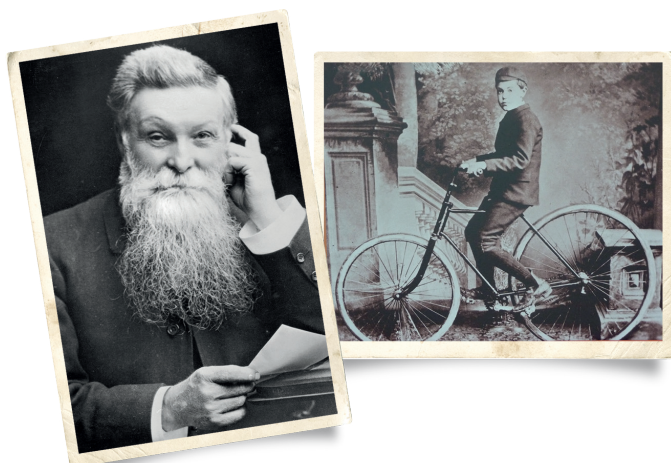

// A PRODUCT THAT CHANGED THE WORLD

John Dunlop's idea about air-filled rubber hoses was the beginning of an industrial manufacturing of air-filled tires and, later, a development of hydraulic and industrial hoses.

At Dunlop Hiflex, **we specialize in high and low-pressure hoses**. With the advantage of **manufacturing** in our own factories, we are leading the development of the **next generation of top-quality hoses**. Moreover, our widespread branch network throughout the Nordic Countries and Germany provides customers with an excellent service. Today we are a part of the Alfacomma Group, one of the leading manufactures of hoses in the world. But we still carry the name that originated from a Scot and bike with pride.

9

PLANTS

34

STORES

170

DISTRIBUTORS

FINLAND

Hämeenlinna
Imatra
Joensuu
Jyväskylä
Kotka
Kouvola
Mikkeli
Pirkkala
Rovaniemi
Turku
Vantaa

ESTONIA

Tallinn
Tartu

SWEDEN

Borlänge
Göteborg
Halmstad
Helsingborg
Ljungby
Malmö
Norrköping
Stockholm
Umeå
Växjö
Örebro

DENMARK

Kolding

NORWAY

Bergen
Harstad
Kristiansand
Sarpsborg
Stavanger
Tromsø
Trondheim
Ålesund

GERMANY

Nürnberg




// ALFAGOMMA GROUP

Dunlop Hiflex was acquired by Alfagomma Group in 2005. The Group, established in 1956, is a global manufacturer specialized in highly engineered, technically demanding hydraulic and industrial products, created with a commitment to excellence in quality and innovation.

// RESEARCH AND DEVELOPMENT


Alfagomma is focused on continuous improvement, proven by its constant engineering innovation at product, process and production level, which has made it possible to quickly respond to evolving international regulations, improving products performance, safety and efficiency.

The company's distinguishing feature is its ability to innovate, by investing in research and development of products and materials, and designing solutions that meet customer's requirements, in compliance with international regulations.

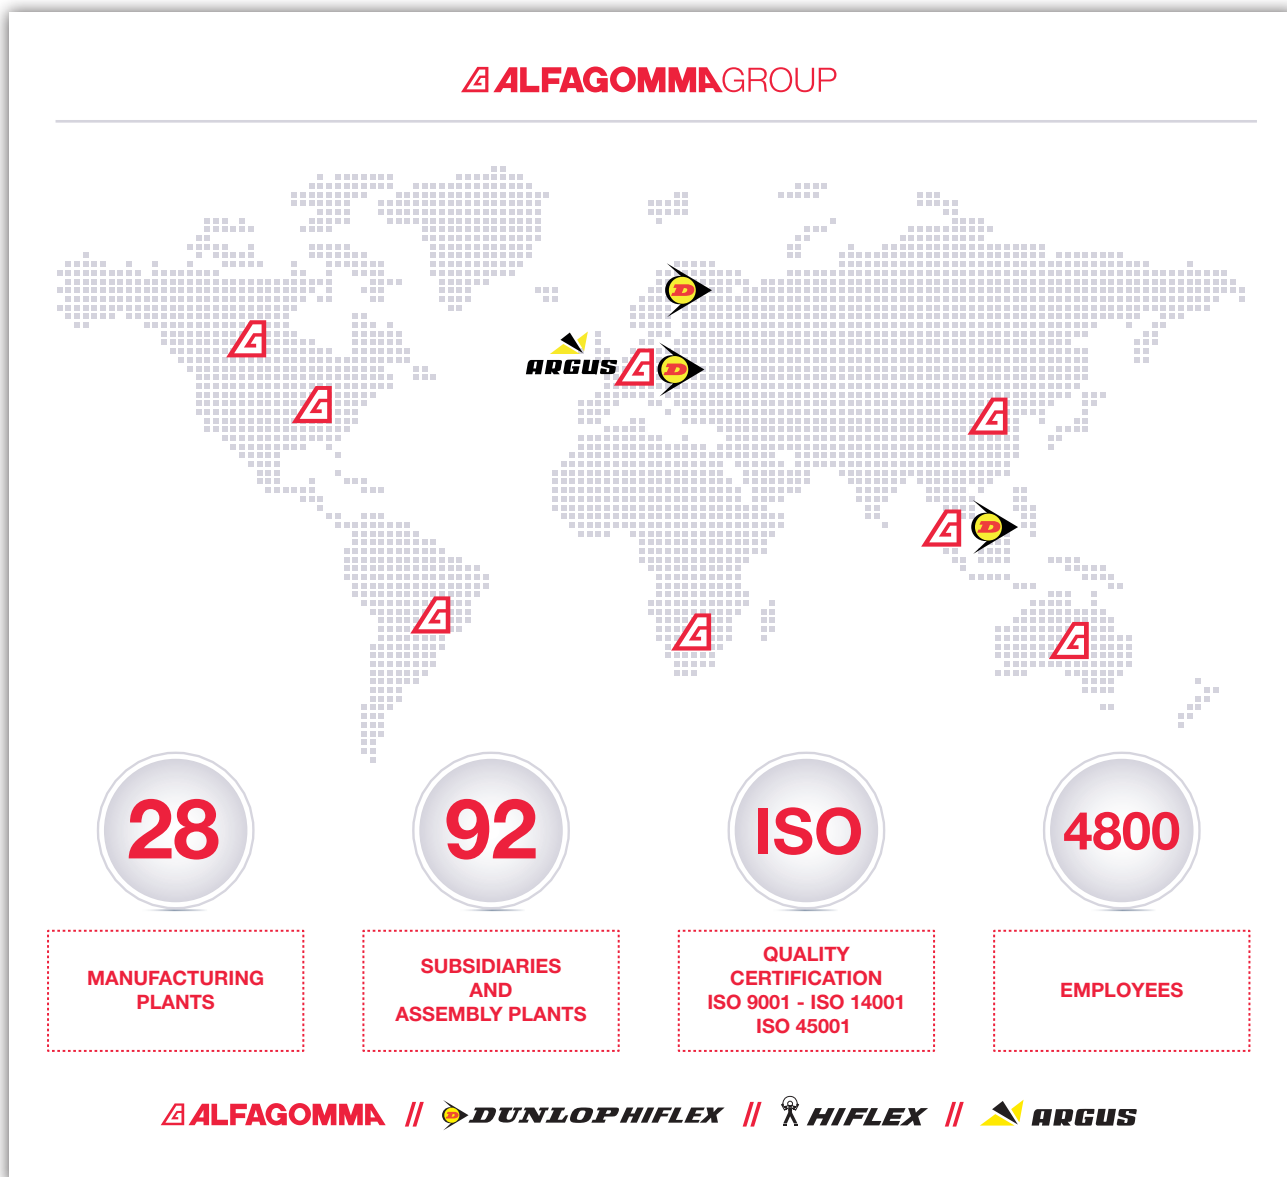


// ASSEMBLED CONCRETE HOSES

// 741AA

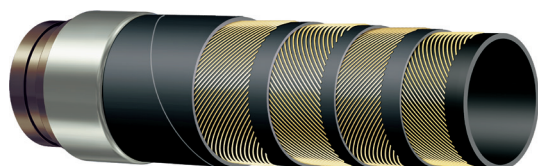
**Concrete pumping 100 bar (1500 PSI) - Extra service - Steel reinforced****Tube:** black conductive NR - abrasion resistant.**Reinforcement:** high-tensile steel cords.**Cover:** black conductive SBR/NR - abrasion and ozone resistant.**Application:** high pressure concrete pumping. Designed for long service life in heavy duty applications.**Temperature:** -30 °C +80 °C (-22 °F +176 °F)

Item Code	Description	ID (in)	Length (m)	Coupling type	Head DN (in)	Head DN (mm)	Number of couplings	BR (mm)	KG/m
9037846	IASS-740AA 051/2CALIF 2" 10M AG	2"	10	Calif	2"	77	2	255	2,57
9180550	IASS-741AA 051/2VICT 3" 4,5M AG IP	2"	4,5	VICT	3"	89	2	255	2,57
9134985	IASS-741AA 051/2VICT 3" 5M AG IP	2"	5	VICT	3"	89	2	255	2,57
9193044	IASS-741AA 051/2VICT 3" 10M AG IP	2"	5	VICT	3"	89	2	255	2,57
9072892	IASS-741AA 065/1VICT 3" 10M AG	2 1/2"	10	VICT	3"	89	1	315	3,30
9072899	IASS-741AA 065/2VICT 3" 4M AG 2	2 1/2"	4	VICT	3"	89	2	315	3,30
9072901	IASS-741AA 065/2VICT 3" 5M AG 2	2 1/2"	5	VICT	3"	89	2	315	3,30
9072902	IASS-741AA 065/2VICT 3" 10M AG	2 1/2"	10	VICT	3"	89	2	315	3,30
9072903	IASS-741AA 065/2VICT 3" 15M AG	2 1/2"	15	VICT	3"	89	2	315	3,30
9180548	IASS-741AA 076/1VICT 3" 4M AG	3"	4	VICT	3"	89	1	380	4,95
9134986	IASS-741AA 076/2VICT 3" 3M AG	3"	3	VICT	3"	89	2	380	4,95
9180551	IASS-741AA 076/2VICT 3" 4M AG	3"	4	VICT	3"	89	2	380	4,95
9140615	IASS-741AA 076/2VICT 3" 4,5M AG	3"	4,5	VICT	3"	89	2	380	4,95
9134987	IASS-741AA 076/2VICT 3" 5M AG	3"	5	VICT	3"	89	2	380	4,95
9180549	IASS-741AA 102/2VICT 4" 1/2 4M AG	4"	4	VICT	4 1/2"	127	1	510	7,63
9033347	IASS-741AA 102/2VICT 4" 1/2 3M AG	4"	3	VICT	4 1/2"	127	2	510	7,63
9008145	IASS-741AA 102/2VICT 4" 1/2 4M AG	4"	2	VICT	4 1/2"	127	2	510	7,63
9010596	IASS-741AA 127/1VICT 5" 1/2 3M AG	5"	3	VICT	5 1/2"	148	1	635	10,46
9010594	IASS-741AA 127/1VICT 5" 1/2 4M AG	5"	4	VICT	5 1/2"	148	1	635	10,46
9188016	IASS-741AA 127/2VICT 5" 1/2 1M AG	5"	1	VICT	5 1/2"	148	2	635	10,46
9009315	IASS-741AA 127/2VICT 5" 1/2 4M AG	5"	4	VICT	5 1/2"	148	2	635	10,46

REV.1.1

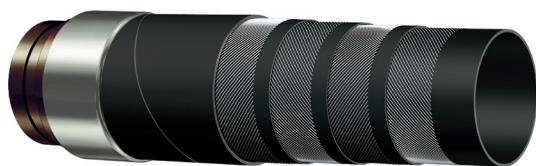// 74SAA **NEW****Concrete pumping 85 bar (1275 psi) - Heavy duty - Textile reinforced****Tube:** black conductive NR - abrasion resistant.**Reinforcement:** high-tensile textile cords.**Cover:** black conductive SBR/NR - abrasion and ozone resistant.**Application:** high pressure concrete pumping. Special lightweight construction.**Temperature:** -30 °C +80 °C (-22 °F +176 °F)


Item Code	Description	ID (in)	Length (m)	Coupling type	Head DN (in)	Head DN (mm)	Number of couplings	BR (mm)	KG/m
9127495	IASS-74SAA 051/2VICT 2" 5M AG	2	5	VICT	2	60	2	255	2,15
9127496	IASS-74SAA 051/2VICT 2" 10M AG	2	10	VICT	2	60	2	255	2,15
9127497	IASS-74SAA 051/1VICT 3" 5M AG IP	2	5	VICT	3	89	1	255	2,15
9127498	IASS-74SAA 051/1VICT 3" 10M AG IP	2	10	VICT	3	89	1	255	2,15
9080219	IASS-74SAA 051/2VICT 3" 5M AG IP	2	5	VICT	3	89	2	255	2,15
9080218	IASS-74SAA 051/2VICT 3" 10M AG IP	2	10	VICT	3	89	2	255	2,15
9137176	IASS-74SAA 065/1VICT 3" 10M AG	2 1/2	10	VICT	3	89	1	315	2,7
9140946	IASS-74SAA 065/2VICT 3" 3M AG 2	2 1/2	3	VICT	3	89	2	315	2,7
9137177	IASS-74SAA 065/2VICT 3" 4M AG 2	2 1/2	4	VICT	3	89	2	315	2,7
9137178	IASS-74SAA 065/2VICT 3" 5M AG 2	2 1/2	5	VICT	3	89	2	315	2,7
9137179	IASS-74SAA 065/2VICT 3" 10M AG	2 1/2	10	VICT	3	89	2	315	2,7
9137180	IASS-74SAA 065/2VICT 3" 15M AG	2 1/2	15	VICT	3	89	2	315	2,7
9127499	IASS-74SAA 076/1VICT 3" 4M AG	3	4	VICT	3	89	1	380	3,65
9127500	IASS-74SAA 076/1VICT 3" 5M	3	5	VICT	3	89	1	380	3,65
9127501	IASS-74SAA 076/1VICT 3" 10M AG	3	10	VICT	3	89	1	380	3,65
9127502	IASS-74SAA 076/2VICT 3" 3M AG	3	3	VICT	3	89	2	380	3,65
9127504	IASS-74SAA 076/2VICT 3" 4M AG	3	4	VICT	3	89	2	380	3,65
9080216	IASS-74SAA 076/2VICT 3" 5M AG	3	5	VICT	3	89	2	380	3,65
9127502	IASS-74SAA 076/2VICT 3" 10M AG	3	10	VICT	3	89	2	380	3,65

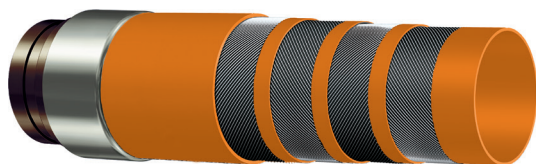// CONCRETE FLAT HD **NEW****Concrete Pumping 85 bar (1275 psi) Heavy Duty Textile reinforced****Tube:** TPU - abrasion resistant.**Reinforcement:** high tensile aramid yarns.**Cover:** TPU - abrasion resistant.**Application:** Lay flat end hose for concrete pumping.**Temperature:** -50 °C +75 °C (-58 °F +167 °F)

Item Code	Description	ID (in)	Length (m)	Coupling type	Head DN (in)	Head DN (mm)	Number of couplings	KG/m
9139094	CONCRETE FLAT HD 110/1VICT 4 1/2" 4M	4	4	VICT	4 1/2	127	1	1,73
9139095	CONCRETE FLAT HD 110/1VICT 4 1/2" 6M	4	6	VICT	4 1/2	127	1	1,73
9139096	CONCRETE FLAT HD 110/1VICT 4 1/2" 8M	4	8	VICT	4 1/2	127	1	1,73
9139097	CONCRETE FLAT HD 110/1VICT 4 1/2" 10M	4	10	VICT	4 1/2	127	1	1,73
9139098	CONCRETE FLAT HD 135/1VICT 5 1/2" 4M	5	4	VICT	5 1/2	148	1	2,46
9139099	CONCRETE FLAT HD 135/1VICT 5 1/2" 6M	5	6	VICT	5 1/2	148	1	2,46
9139100	CONCRETE FLAT HD 135/1VICT 5 1/2" 8M	5	8	VICT	5 1/2	148	1	2,46
9139101	CONCRETE FLAT HD 135/1VICT 5 1/2" 10M	5	10	VICT	5 1/2	148	1	2,46

// CONCRETE HOSES

// 741AA

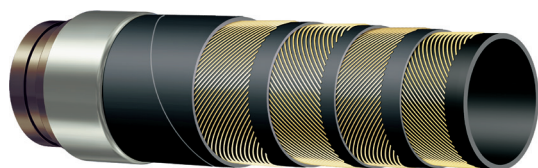**Concrete pumping 100 bar (1500 psi) - Extra service - Steel reinforced****Tube:** black conductive NR - abrasion resistant.**Reinforcement:** high tensile steel cords.**Cover:** black conductive SBR/NR - abrasion and ozone resistant.**Application:** high pressure concrete pumping. Designed for long service life in heavy duty applications.**Temperature:** -30 °C +80 °C (-22 °F +176 °F)

Item Code	ID (mm)	ID (in)	OD (mm)	WP (bar)	BP (bar)	BR (mm)	Weight (kg/m)	Length (m)
2006449	51,0	2"	69,0	100	200	255	2,650	20,000
2014453	65,0	2 9/16"	87,0	100	200	335	3,920	61,000
2011840	76,0	3"	100,0	100	200	380	5,090	30,500
2001932	102,0	4"	128,0	100	200	510	7,820	20,000

// 375AH

**Hot water 10 bar (150 psi)****Tube:** black EPDM.**Reinforcement:** high tensile textile cords.**Cover:** red EPDM - heat, abrasion and ozone resistant.**Application:** general purpose-hot water.**Temperature:** -35 °C +100 °C (-31 °F +212 °F)

Item Code	ID (mm)	ID (in)	OD (mm)	WP (bar)	BP (bar)	BR (mm)	Weight (kg/m)	Length (m)
2003773	13,0	1/2"	19,0	10	30	130	0,240	50,000
2003775	16,0	5/8"	22,0	10	30	160	0,280	50,000
2003777	19,0	3/4"	27,0	10	30	190	0,450	50,000
2003779	25,0	1"	33,0	10	30	250	0,570	50,000




// CONCRETE COUPLINGS

// IV39VL00

VICTAULIC COMPATIBLE STYLE

Hardened steel hose shank complete with pre-crimped ferrule




Item Code	ID (in)	Hose ID (mm)	Head DN (in)	Head DN (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Hose OD Range (min) (mm)	Hose OD Range (max) (mm)
2306772	2"	51,0	2"	60,3	60,3	57,2	16,0	20,0	66,0	69,0
2307707	2"	51,0	3"	88,9	88,9	84,0	16,0	20,0	66,0	69,0
2307873	2 9/16"	65,0	3"	88,9	88,9	84,9	16,0	20,0	85,0	87,0
2301754	3"	76,0	3"	88,9	88,9	84,0	16,0	20,0	97,0	103,0
2302217	4"	102,0	4"	114,3	114,3	108,3	17,0	20,0	125,0	130,0
2302216	4"	102,0	4 1/2"	127,0	127,0	115,0	17,0	20,0	125,0	130,0

// IV39RL00

SHOULDERED STYLE

Hardened steel hose shank complete with pre-crimped ferrule




Item Code	ID (in)	Hose ID (mm)	Head DN (in)	Head DN (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Hose OD Range (min) (mm)	Hose OD Range (max) (mm)
2306505	3 1/2"	90,0	4 1/2"	127,0	127,0	115,0	17,0	20,0	113,0	116,0

// IV39JL00

CALIFORNIA STYLE - HEAVY DUTY RAISED END

Hardened steel hose shank complete with pre-crimped ferrule



Item Code	ID (in)	Hose ID (mm)	Head DN (in)	Head DN (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Hose OD Range (min) (mm)	Hose OD Range (max) (mm)
2303026	2"	51,0	2"	77,7	77,7	69,9	12,7	20,0	66,0	69,0

REV.1.1

// I1Y9V-COAS

VICTAULIC COMPATIBLE STYLE

Connection Clamp - Adjustable snap lever type - Plated Steel



Item Code	DN (max) (mm)	DN (in)	Tech. Note
2305541	89	3"	WP=100 BAR
2305543	114	4"	WP=100 BAR
2305544	127	4" 1/2	WP=100 BAR
2305546	148	5" 1/2	WP=100 BAR

gasket not included

// I1Y9V-COFX

VICTAULIC COMPATIBLE STYLE

Connection Clamp - Fixed lever type - Plated Steel



Item Code	DN (min) (mm)	DN (in)	Tech. Note
2307587	89	3"	WP=100 BAR
2307588	127	4" 1/2	WP=100 BAR
2307589	148	5" 1/2	WP=85 BAR

gasket not included //// NOTE: size 2" - 2" 1/2: Long Lever type

// IEJM9V

VICTAULIC COMPATIBLE STYLE

Profiled seal for connection clamp - EPDM



Item Code	DN (mm)	Technical Note
2307373	89	DN3"
2305547	114	DN4"
2305548	127	DN4" 1/2
2305550	148	DN5" 1/2

// I1Y9J-COFX

CALIFORNIA STYLE - HEAVY DUTY RAISED END

Connection clamp - Fixed lever type - Plated Steel



Item Code	DN (min) (mm)	DN (in)	Tech. Note
2307702	78	2"	WP=85 BAR

Clamp complete with seal

// ISJM9J

CALIFORNIA STYLE - HEAVY DUTY RAISED END

Profiled seal for connection clamp - SBR




Item Code	DN (mm)	Technical Note
2307703	78	DN2"

// I1A9V19V

VICTAULIC COMPATIBLE STYLE

Reducer pipe - Painted steel

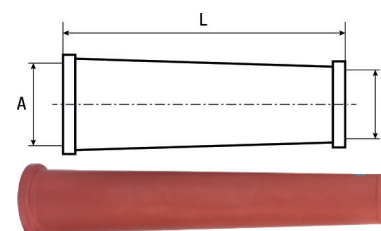

Item Code	Thread Type 1	DN Head 1 (in)	DN Head 1 (mm)	Thread Type 2	DN Head 2 (in)	DN Head 2 (mm)	A (mm)	B (mm)	L (mm)
2307595	VICT	3"	89	VICT	3"	89	75,0	50,0	500,0
2307596	VICT	3"	89	VICT	3"	89	75,0	65,0	500,0
2307594	VICT	4 1/2"	127	VICT	3"	89	100,0	65,0	500,0
2307593	VICT	4 1/2"	127	VICT	3"	89	100,0	75,0	500,0
2307592	VICT	5 1/2"	148	VICT	3"	89	125,0	75,0	1000,0
2307590	VICT	5 1/2"	148	VICT	4 1/2"	127	125,0	100,0	500,0

REV.1.1

// IAY-BALL-S

CONCRETE COUPLING - ACCESSORY

Cleaning soft ball - Sponge



Item Code	DN (min) (mm)	Tech. Note
2305551	60	
2305552	80	
2310833	90	
2305553	100	
2305554	125	
2305555	150	

// IAY-BALL-M

CONCRETE COUPLING - ACCESSORY

Cleaning ball - medium - Sponge



Item Code	DN (min) (mm)
2308442	60

// R1S01AB

Protective Round Spring Guard - one straight end / one closed end -
Plated Steel



Item Code	ID (mm)	L (m)
1902082	90	1,1
1902083	105	1,1

// MORTAR HOSES

// 757AA

**Plaster 40 bar (600 psi)****Tube:** black conductive NR - abrasion resistant.**Reinforcement:** high tensile textile cords.**Cover:** black conductive SBR/NR - abrasion and ozone resistant.**Application:** plaster pumping.**Temperature:** -30 °C +80 °C (-22 °F +176 °F)

Item Code	ID (mm)	ID (in)	OD (mm)	WP (bar)	BP (bar)	Weight (kg/m)	Length (m)
2001943	25,0	1"	38,0	40	100	0,730	40,000
2004809	25,0	1"	38,0	40	100	0,730	61,000
2001944	32,0	1 1/4"	46,0	40	100	0,910	40,000
2004700	32,0	1 1/4"	46,0	40	100	0,910	61,000
2001946	38,0	1 1/2"	54,0	40	100	1,280	40,000
2001947	51,0	2"	67,0	40	100	1,680	40,000

REV.1.1

// MORTAR COUPLINGS

// I978C1IP

MORTAR

System 22 - Male adapter - Serrated hose shank with collar - full flow bore - Malleable iron



Item Code	ID (in)	Hose ID (mm)	Head DN (mm)
2305260	1"	25,0	41,0
2305706	1 3/8"	35,0	49,5
2305147	1 1/2"	38,0	49,5
2304631	2"	50,0	63,0

// I978C1IP1

MORTAR

System 23.5 - Male adapter - Serrated hose shank with collar - full flow bore - Malleable iron



Item Code	ID (in)	Hose ID (mm)	Head DN (mm)
2307841	1"	25,0	63,0
2307842	1 3/8"	35,0	63,0
2307843	1 5/8"	42,0	63,0
2308170	2"	50,0	63,0

// I978C2IP

MORTAR

System 22 - Female coupler complete with seal - Serrated hose shank with collar - full flow bore - Malleable iron



Item Code	ID (in)	Hose ID (mm)	Head DN (mm)
2305261	1"	25,0	42,0
2305149	1 3/8"	35,0	51,0
2305150	1 1/2"	38,0	51,0
2304634	2"	50,0	64,0

// I970618C

MORTAR

BSPP Male - Serrated hose shank with collar - full flow bore - Malleable iron



Item Code	ID (in)	Hose ID (mm)	Thread Type	Thread (in)
2305262	1"	25,0	BSPP	1"
2305152	1 3/8"	35,0	BSPP	1" 1/4
2305153	1 3/8"	35,0	BSPP	2"
2305677	1 1/2"	38,0	BSPP	1" 1/4
2305678	1 5/8"	42,0	BSPP	1" 1/2
2305154	1 5/8"	42,0	BSPP	2"
2304635	2"	50,0	BSPP	2"

// I938C100

MORTAR

System 22 - Male adapter - Hose shank - Malleable iron



Item Code	ID (in)	Hose ID (mm)	Head DN (mm)
2302084	1"	25,0	35,0
2301758	1"	25,0	41,0
2302086	1 3/8"	35,0	49,5
2307098	1 1/2"	38,0	49,5
2302088	2"	51,0	63,0

// I938C200

MORTAR

System 22 - Female coupler complete with seal - Hose shank - Malleable iron



Item Code	ID (in)	Hose ID (mm)	Head DN (mm)
2302092	1"	25,0	35,5
2302093	1"	25,0	42,0
2302094	1 3/8"	35,0	51,0
2302819	1 3/8"	35,0	64,0
2302095	2"	51,0	64,0

REV.1.1

// I1306100

MORTAR

BSPP Male - Hose shank - Plated steel



Item Code	ID (in)	Hose ID (mm)	Thread Type	Thread (in)
2302310	1"	25,0	BSPP	1"
2302311	1 3/8"	35,0	BSPP	1" 1/4
2302083	2"	51,0	BSPP	2"

// I107U-PH

Serrated ferrule - Plated steel




Item Code	ID (in)	Hose ID (mm)	Ferrule ID (mm)	Ferrule OD (mm)	L (mm)	Hose OD Range (min) (mm)	Hose OD Range (max) (mm)
2304505	1"	25,0	41,0	50,0	50,0	39,0	39,0
2304501	1 3/8"	35,0	49,0	58,0	55,0	49,0	49,0
2304502	1 1/2"	38,0	53,0	61,0	55,0	52,0	52,0
2305894	1 5/8"	42,0	56,0	65,0	55,0	56,0	56,0
2304542	2"	50,0	68,5	75,0	60,0	68,0	68,0

// I9A8C606

MORTAR

System 22 - Male adapter - BSPP Female - Malleable iron




Item Code	DN Head 1 (mm)	Thread Type 2	DN Head 2 (in)
2305699	35	BSPP	1"
2305701	41	BSPP	1"
2305700	50	BSPP	1"
2305704	50	BSPP	1 1/4"
2305702	50	BSPP	1 1/2"
2305703	63	BSPP	2"

// I9A8C6061

MORTAR

System 23.5 - Male adapter - BSPP Female - Malleable iron



Item Code	DN Head 1 (mm)	Thread Type 2	DN Head 2 (in)
2301553	50	BSPP	1 1/4"
2300345	63	BSPP	2"

// I9A8C806

MORTAR

System 22 - Female coupler complete with seal - BSPP Female - Malleable iron



Item Code	DN Head 1 (mm)	Thread Type 2	DN Head 2 (in)
2305668	36	BSPP	1"
2305670	42	BSPP	1"
2305669	51	BSPP	1"
2305672	51	BSPP	1 1/4"
2304633	51	BSPP	1 1/2"
2305671	64	BSPP	2"

// I9A8C8061

MORTAR

System 23.5 - Female coupler complete with seal - BSPP Female - Malleable iron



Item Code	DN Head 1 (mm)	Thread Type 2	DN Head 2 (in)
2301405	51	BSPP	1 1/4"
2300346	64	BSPP	2"

REV.1.1

// I9A8C58C

MORTAR

System 22 - Reducing Male adapter - Male adapter - Malleable iron



Item Code	DN Head 1 (mm)	Thread Type 2	DN Head 2 (mm)
2305892	50	MORTAR	35
2305893	50	MORTAR	41

// DUNLOP HIFLEX SCANDINAVIA

// SWEDEN

HEADQUARTER

DUNLOP HIFLEX AB

Seldonsvägen 2, Halmstad

+46 (0)10-414 44 00

info@dunlophiflex.se

BORLÄNGE

+46 (0)10-414 46 00

borlange@dunlophiflex.se

GÖTEBORG

+46 (0)10-414 45 40

goteborg@dunlophiflex.se

HALMSTAD

+46 (0)10-414 44 04

halmstad@dunlophiflex.se

HELSINGBORG

+46 (0)10-414 45 60

helsingborg@dunlophiflex.se

LJUNGBY

+46 (0)10-414 45 20

ljungby@dunlophiflex.se

MALMÖ

+46 (0)10-414 45 00

malmo@dunlophiflex.se

NORRKÖPING

+46 (0)10-414 45 70

norrkoping@dunlophiflex.se

STOCKHOLM

+46 (0)10-414 45 80

stockholm@dunlophiflex.se

UMEÅ

+46 (0)10-414 45 30

umea@dunlophiflex.se

VÄXJÖ

+46 (0)10-414 45 10

vaxjo@dunlophiflex.se

ÖREBRO

+46 (0)10-414 45 50

orebro@dunlophiflex.se

// NORWAY

HEADQUARTER

DUNLOP HIFLEX AS

Buråsen 7, Kristiansand

+47 23 00 47 00

sales@dunlophiflex.no

BERGEN

+47 23 00 47 70

bergen@dunlophiflex.no

HARSTAD

+47 23 00 48 10

harstad@dunlophiflex.no

KRISTIANSAND

+47 23 00 47 50

kristiansand@dunlophiflex.no

SARPSBORG

+47 23 00 48 30

sarpsborg@dunlophiflex.no

STAVANGER

+47 23 00 47 60

stavanger@dunlophiflex.no

TROMSØ

+47 23 00 48 20

tromso@dunlophiflex.no

TRONDHEIM

+47 23 00 48 00

trondheim@dunlophiflex.no

ÅLESUND

+47 23 00 47 80

alesund@dunlophiflex.no

// DENMARK

HEADQUARTER

DUNLOP HIFLEX A/S

Kokbjerg 1A, Kolding

+45 43 25 40 00

kundeservice@dunlophiflex.dk





HEAD OFFICE DUNLOP HIFLEX SCANDINAVIA

Dunlop Hiflex AB

Seldonsvägen 2

302 62 Halmstad

Tel +46 (0)10-414 44 00

info@dunlophiflex.se

www.dunlophiflex.se