


## SMOOTH COVER HYDRAULIC HOSE








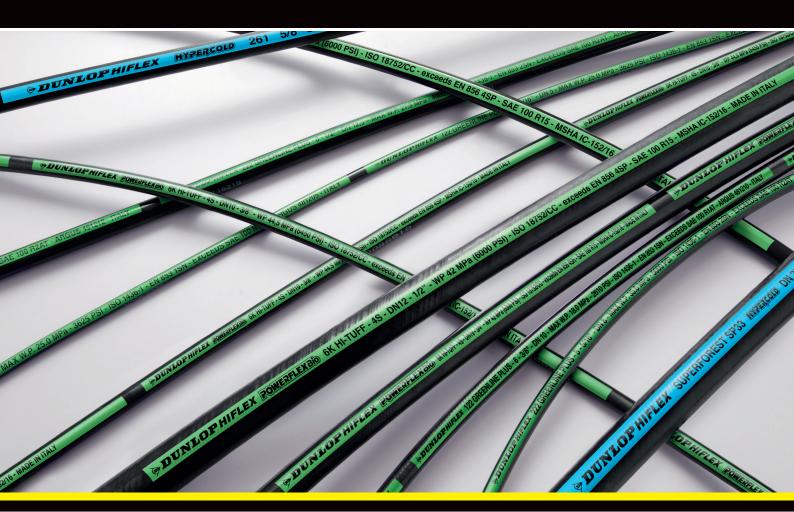

## **SMOOTH COVER HYDRAULIC HOSE**

THE HIGH QUALITY HOSE SPECIFICATIONS HAVE NOT CHANGED
MAINTAINING THE SAME PREMIUM OZONE AND ABRASION RESISTANCE
CRIMPING DIAMETERS WILL ALSO REMAIN UNCHANGED



## **FURTHER BENEFITS ARE**

- **EASY TO CLEAN**
- **EASIER TO REWIND**
- EASIER TO ASSEMBLE WHERE HOSE PROTECTION IS NEEDED
- REDUCED FRICTION IN APPLICATIONS USING TENSIONING ROLLERS
- > REDUCED FRICTION AND WEAR

## SMOOTH COVER HYDRAULIC HOSES WILL BE GRADUALLY INTRODUCED IN

**WIRE BRAIDED \*** 

DIAMETERS UP TO DN 25 - 1"

WIRE SPIRAL \*

DIAMETERS UP TO **DN 25 - 1**"

<sup>\*</sup> Tuflex version is excluded